

## Product Description

DME PROLINK's Category 6 U/UTP cables are manufactured and tested to the TIA/EIA 568-C2, EN50173-1 and ISO/ IEC 11801 Category 6 specifications. DME PROLINK's Category 6 U/UTP cable is designed for optimal support of High-Speed data protocols delivering 1 Gbps performance to the workstation. Each cable consists of 8 colour coded 24AWG High Density polyethylene insulated conductors. Each conductors are twisted together to form 4 pairs with varying lengths. These pairs are then put around a central 'X' shaped polyethylene filler/Separator which helps in maintaining and enhancing the cable performance. DME PROLINK's CAT6 cable is designed for quick and easy installation where no special tools are required. CAT6 cable is supplied in "Reelex" packaging for fast, snag free installation.

## Features & Benefits

- Performance exceeding Category 6 specifications of 250MHz
- Performance compliance to ISO/IEC 11801 and ANSI/TIA-568-C2
- Third Party Delta EC verified
- AWG 24, Solid Bare Copper
- PVC
- 25 Years System Warranty

## Standards Complied and Verified for Category 6 Cable Performance


- ISO/IEC 11801:2017
- ANSI/TIA-568-C2:2009
- IEC 61156-5:2009 + AMD1:2012 CSV Consolidated version
- BS EN 50173-1:2018
- EN 50288-6-1:2013

### Supporting Applications

- 10G BASE-T (Length <50m)
- 1000BASE-T (Gigabit Ethernet)
- 100BASE-T (IEEE 802.3)
- 100BASE-VG-AnyLAN
- 100 Mbps TP-PMD (ANSI X3T9.5)
- 10BASE-T (IEEE 802.3)
- 1.2 Gbps ATM
- 55/155 Mbps ATM
- 4/16 Mbps TOKEN RING (IEEE 802.5)

### Specification

Overall Diameter (mm)	5.9 ± 0.3
Sheath Type / Surface	PVC / Clean, Frap, Satiation
Insulation Material	HDPE
Conductor Diameter (mm)	0.53 (± 0.01)
Conductor Material	Solid Bare Copper
Impedance (Ω) @ 1-250 MHz	100 ± 15 Ω
Delay Skew (ns/100m) @ 1-250 MHz	≤ 45
Max. DC Resistance (Ω/100m)	9.38
Max. DC Conductor Resistance Unbalance (%)	5.0
Nominal Velocity of Propagation (NVP)	69%
Rip cord	Yes
Drain Wire	No
Max. Pulling Force (N)	115
Min. Bend Radius during Installation	4xD (Overall diameter)
Min. Bend Radius after Installed	4xD (Overall diameter)
Installation Temperature Range	0°C to +60°C
Operating Temperature Range	-20°C to +70°C
Packing Length (Meters)	305 ± 1.5

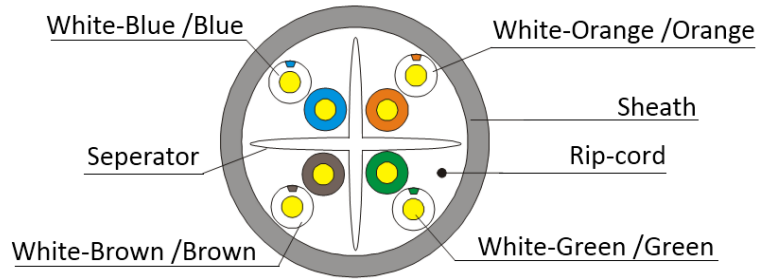

## Technical Performance

Freq. (MHz)	RL (Min. dB)	ATTN (Max. dB/100m)	NEXT (Min. dB)	PSNEXT (Min. dB)	ELFEXT (ACR-F) (Min. dB/100m)	PSELFEXT (PSACR-F) (Min. dB/100m)	Phase Delay (Max. ns)
1	19.1	1.9	65.0	62.0	64.2	61.2	570.00
4.0	21.0	3.5	64.1	61.8	52.1	49.1	552.00
8.0	21.0	5.0	59.4	57.0	46.1	43.1	547.00
10.0	21.0	5.5	57.8	55.5	44.2	41.2	545.00
16.0	20.0	7.0	54.6	52.2	40.1	37.1	543.00
20.0	19.5	7.9	53.1	50.7	38.2	35.2	542.00
25.0	19.0	8.9	51.5	49.1	36.2	33.2	541.00
31.25	18.5	10.0	50.0	47.5	34.3	31.3	540.00
62.5	16.0	14.4	45.1	42.7	28.3	25.3	539.00
100	14.0	18.6	41.8	39.3	24.2	21.2	538.00
200	11.0	27.4	36.9	34.3	18.2	15.2	537.00
250	10.0	31.1	35.3	32.7	16.2	13.2	536.00

## Part Number

**D01715-UU3PVGY**

**Horizontal Cable, CAT6, U/UTP, 305m, PVC Sheath, 24AWG, Grey**

## Requirements & Test Results


### Capacitance

	C [nF/100m]
Upper limit	5.60
Lower limit	4.00
1-2	4.98
2-3	4.55
3-4	4.89
4-1	4.81

### E

	E[pF/100m]
Upper limit	330
Lower limit	-330
1-2	0
2-3	170
3-4	225
4-1	3


### Attenuation[dB]

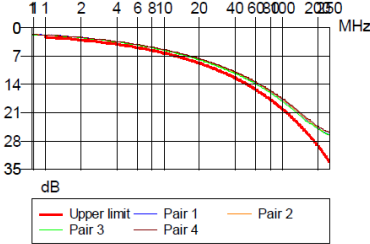


### Attenuation Worst case [dB]

Pair	Worst case	Value	Freq.
1	0.39	1.63	1.00
2	0.36	1.66	1.00
3	0.29	2.24	1.68
4	0.35	1.68	1.00


### NEAR END XT [dB]

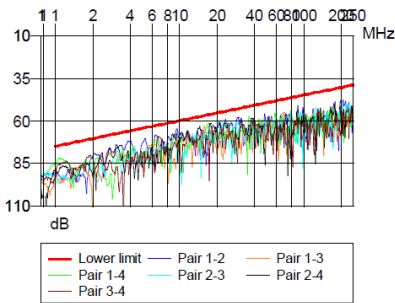

### Impedance

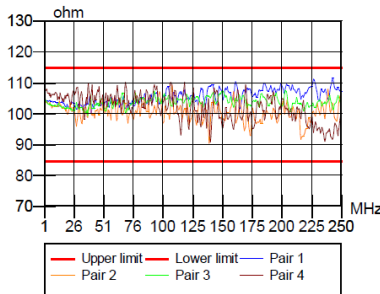

### RL[dB]

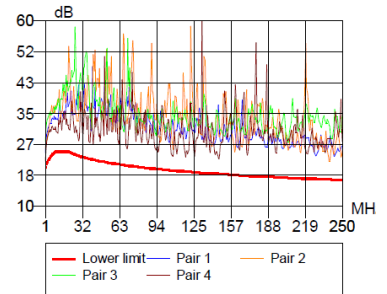

### NEXT worst case [dB]

Pair	Worst case	Value	Freq.
1-2	5.09	64.79	9.40
1-3	6.79	63.10	15.82
1-4	5.88	61.72	17.01
2-3	6.33	60.76	21.12
2-4	5.86	60.38	20.82
3-4	7.31	69.18	6.75


### Impedance Statistics

Pair	Minimum	Freq. of min	Maximum	Freq. of max
1	100.01	40.65	111.57	242.52
2	90.36	139.09	109.02	107.94
3	99.32	37.53	107.47	203.27
4	90.73	140.34	111.26	0.77


### RL Worst case [dB]

Pair	Worst case	Value	Freq.
1	5.97	23.37	243.15
2	4.62	22.08	238.78
3	7.87	30.76	40.03
4	3.58	23.45	107.94


### NEXT POWERSUM [dB]

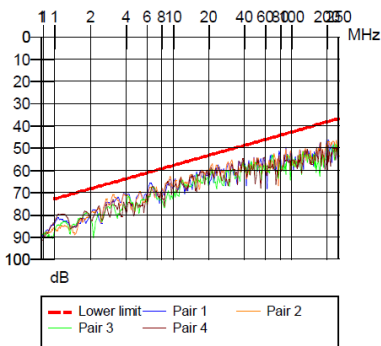

### Phase Delay [nsec]

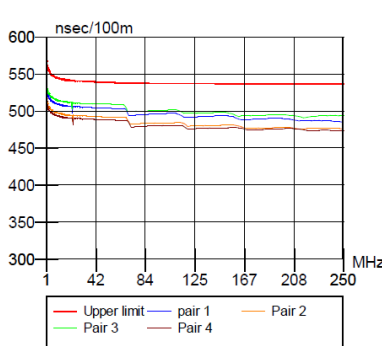

### Propagation Speed

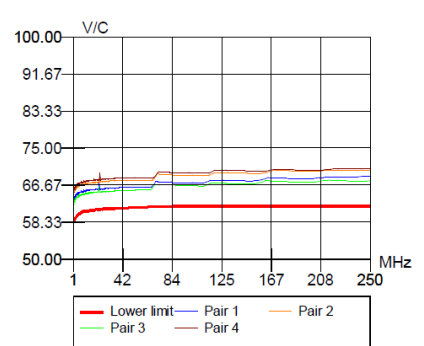

### NEXT POWER SUM Statistics

Pair	Worst case	Value	Freq.
1	5.46	65.70	6.37
2	4.76	57.09	21.43
3	7.04	59.47	21.12
4	6.24	54.62	39.32

### Phase delay Statistics

Pair	Worst case	Value	Freq.
1	34.83	503.76	61.54
2	47.03	491.52	62.44
3	29.74	508.84	61.54
4	50.80	487.92	58.09

### Propagation speed Statistics

Pair	Worst case	Value	Freq.
1	4.24	66.24	66.16
2	5.79	64.29	1.00
3	3.58	65.57	65.21
4	6.32	64.82	1.00