

DME PROLINK Flush Mount Cabinet Front Glass Door | with Mounting Plate 12U, 600mm (W) x 150mm (D)













## **Description**

DME PROLINK's Optical Network Termination (ONT) Cabinet is designed and fabricated in accordance with global Service Provider requirements and conforms precisely to Du and Etisalat FTTx specifications. The robust and durable design makes it easy to install and maintain. This flush mount wall cabinet is available in a range of colors and dimensions to suit any number of user applications.


## **Features & Benefits**

- Dimensions: 12U with Frame Dimension 636mm x 636mm (H x W)
- 600mm x 600mm (H x W) at rear of the cabinet and Depth 150mm (D)
- 5 Entry points on a removable cable entry knockout plate on Top and Bottom.
- Front Tempered Glass Door with Steel Side Panels
- Adjustable 19" Mounting Profile
- Aesthetic design with Ventilation Holes
- Comes with Universal Standard Key & Lock
- Inner mounting Plate with Grid Holes
- 25 Years System Warranty

#### Lock



### **5U Inner Mounting Plate with Grid Holes**

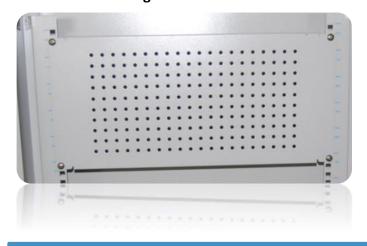

5 cable entry holes on a removable Cable entry Knockout plate on Top and Bottom




#### **Technical Assistance**

Middle East HQ: +971 (4) 8118000



# DME PROLINK Flush Mount Cabinet Front Glass Door | with Mounting Plate 12U, 600mm (W) x 150mm (D)

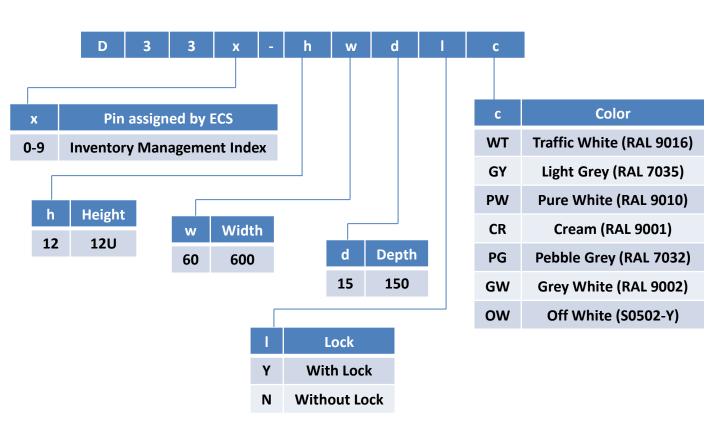

# **Part Number (Example)**

D335-126015YGY	Cabinet, Flush Mount ONT, 12RU, 600 Wide, 150 Deep, with Lock, with Frame, Grey (RAL7035)
D335-126015YPW	Cabinet, Flush Mount ONT, 12RU, 600 Wide, 150 Deep, with Lock, Pure White (RAL9010)
D335-126015YGW	Cabinet, Flush Mount ONT, 12RU, 600 Wide, 150 Deep, with Lock, with Frame, Grey White (RAL9002)
D335-126015YOW	Cabinet, Flush Mount ONT, 12RU, 600 Wide, 150 Deep, with Lock, with Frame, Off White (NCS Color Code: S0502-Y)