




Description

DME PROLINK's Power Distribution Units (PDUs) are units which are mounted into a data/server cabinet, to provide power for the housed active equipments. The 1U plastic bodied PDUs are ideal for Floor/wall mounted cabinets, where weight is an important factor, and rack space is vital.

Components / Specs	Detailed Description
Product Series	1U
Socket Type	GBR(13-1)
Output Unit	10Way
Power Input	Left single input
Bracket Install	Vertically installed
Cable with plug	3M cable with GBR(13)-01 plug
Control Function	Led Indicator. On/OFF Rocker Switch
Shell Color	Black
Cable Specification	H05VV-F3G x 1.5mm ² x 3m
Product Size	L x W x H= 676.6 x 45 x 45mm
Mounting Length	655.6mm
Case Length	625mm
Rating voltage	250VAC 50/60Hz
Rating Current	13A
Max. Current	13A
Max. Power	3250W
Safety Authentication	CE. RoHS.
Socket assemble	10 UK Sockets
Interior Connection Wire	1.5mm ² Brass strip

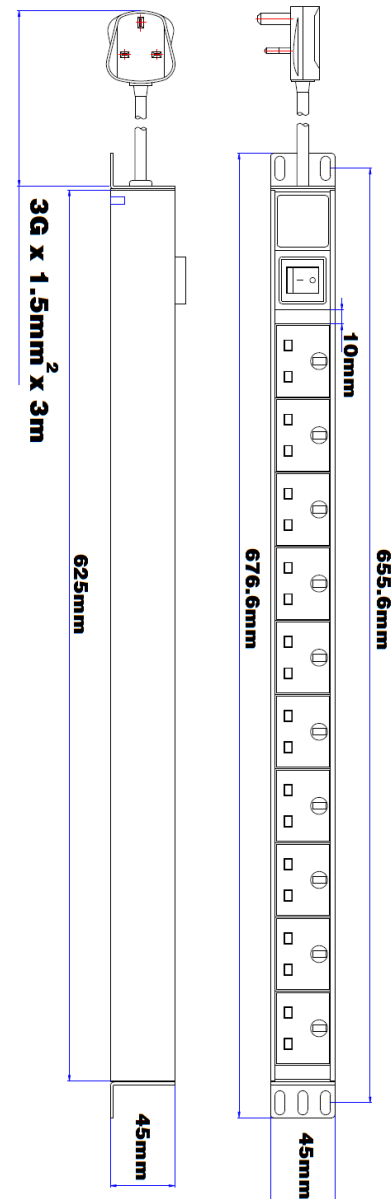

Part Number

D63210-10PDU133BK

Vertical Mount Type PDU, 10way, 1U, 13amp, 3m Cable, CE RoHS complied, with Led Indicator On/OFF Rocker Switch, Black

TUL-GBR(13)N1010WKPBF