



Description

DME PROLINK's Category 3 Voice patch panels offer high performance and a range of installation options. This patch panel feature user-friendly termination and labeling, plus they can be mounted directly to an EIA standard 19-inch relay rack or cabinet.

Electrical Specification

Electrical Insulation Resistance	500 MΩ min. @ 100V DC
Dielectric Withstanding Voltage	1000V DC or AC Peak Contact to Contact @ 60Hz for 1 minute,

Mechanical Specification

Insertion / Extraction Life	750 Cycles Minimum
IDC Wire Gauge	22~26 AWG


Features & Benefits

- 50 Port
- Meets requirements of ISO/IEC 11801:2002 and ANSI/TIA 568.2-D
- High-impact, Flame Retardant Plastic, UL 94V-0
- Tray Type Patch Panel
- 19" Rack Mountable; 1U Rack Space
- UL Listed
- 25 Years System Warranty

Construction

Housing	High-Impact, Flame Retardant Plastic, UL94V-0
Spring Wire / Contact Blades	Phosphor Bronze Alloy Plated with 50 micro-inch of gold
Plating	Gold Flash & 6u" & 15u"
IDC	Phosphor Bronze Alloy with 100 micro-inch 100% Sn Alloy
Front Plate	SPCC-SD 16G
PCB Material	FR4

Dimensions (in mm)

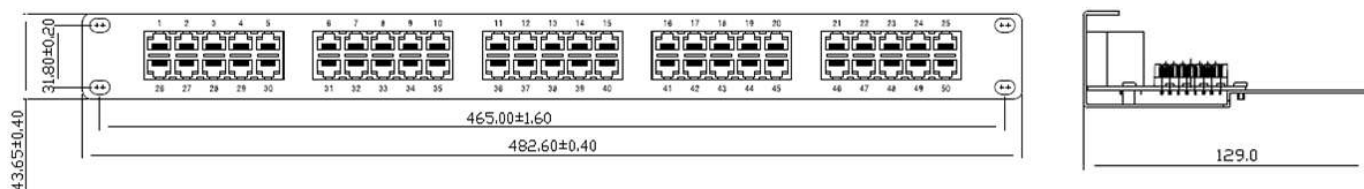

DME PROLINK Voice Patch Panels will have termination field where voice cable can be terminated using 110/66 Punch Down tool. Tool must be ordered separately. (P/N. D7123-PDTOOL)



Part Number

D0413-501UNFLDBK

Voice Patch Panel, CAT3, 50 Port, 1RU, Unshielded, Flush, Loaded, Black